



PICMG 1.3 Backplane

Selection Guide

 PAC series wall-mount Chassis

 4U Rack-mount Chassis








 2U Rack-mount Chassis

Backplane		SPE-4S	SPE-6S	SPE-9S	SPXE-9S	SPXE-14S
Total	Slot	4	6	9	9	14
PCIe	x16					
	x8	2(x16connector)		1+1(x16connector)	1+1(x16connector)	1(x16connector)
	x4	1	5	3	2	
	x1					12
	PCI-X				2	
	PCI			3	2	
PSU TYPE		24+4-pin ATX	24+4-pin ATX	24+4-pin ATX	24+4-pin ATX	24+4-pin ATX
Chassis Option		PAC-106G PAC-107G PAC-1000G PACO-506F	PAC-106G PAC-107G PAC-1000G PACO-506F	PAC-125G	PAC-125G	RACK-305G RACK-360G RACK-814G RACK-3000G

IEI Server Grade Backplane Solution

Server grade backplane accommodates PCIe x8 and multiple PCIe x4 add-on cards. It is specially designed for extensive data transfer application such as data storage server or applications that require more than one PCIe x4 or four PCIe x1 cards. Given the multiple PCIe x4 and x1 supports, it provides a more cost effective solution for end-users by reducing the number of systems.

Server Grade Backplane


Example	Corresponding Model
EX1: 2x8 & 1x4 slots 	SPE-4S 
EX2: 2x8, 3x4 slots 	SPE-9S SPXE-9S  
EX3: 5x4 slots 	SPE-6S 




Server Grade	Integrated, small foot print enhances schematic stable and performance
AMD64	AMD Socket AM2 32/64-bit single/Dual Core CPU supported
ECC support	Reduce the latency of memory access by integrated memory controller
Expansion	28 Configurable PCIe lanes provide direct signal transferring path on the backplane w/o switch
Connectivity	Dual GbE support Load-balancing/TOE/ASF2.0 for data distribution and remote management
Data Protection	6 SATA II with RAID Function supported

Earning extra PCIe x8 Bandwidth beyond 20 PCIe of PICMG1.3

IEI SPE / SPXE series backplanes
 SPE-4S
 SPE-6S
 SPE-9S
 SPXE-9S
 SPXE-14S



X8-PCIE-CB-R10
FFC(Flexible Flat Cable)

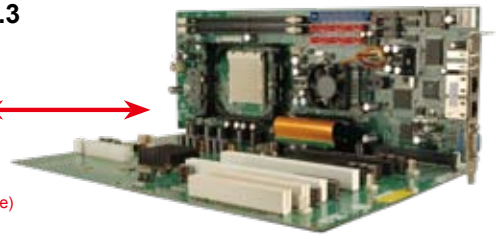


Now earning more PCIE Bandwidth and Flexible PCIe Configuration than Standard PICMG1.3 Via SPCIE-3600AM2

		SPCIE-3600AM2					
PCIE Slots Available (Non -switch)	Type	A	B	C	D	E	F
	x16	1	1	1	-	-	-
	x8	1	1	-	3	2	1
	x4	1	-	2	1	3	5
	x2	-	-	2	-	-	-
	x1	-	4	-	-	-	-
Backplane Solution		IEI SPE/SPXE BP					
Option		To perform bandwidth of full 28 PCIe Lanes, external PCIe x8 converter Board(X8-PCIE-CB-R10) must be used. SPE-4S / SPE-6S is compliant for PICMG1.3 sever-grade SBC with 20 PCIe Lanes Supported					

System Solution for options

Backplane	Total Slot	PCIe						PSU Type	Chassis Option
		x16	x8	x4	x1	PCI-X	PCI		
SPE-4S	4	-	2 (x16 connector)	1	-	-	-	24+4-pin ATX	PAC-106G, PAC-107G, PAC-1000G, PACO-506F
SPE-6S	6	-	-	5	-	-	-	24+4-pin ATX	PAC-106G, PAC-107G PAC-1000G, PACO-506F
SPE-9S	9	-	1+1 (x16 connector)	3	-	-	3	24+4-pin ATX	PAC-125G
SPXE-9S	9	-	1+1 (x16 connector)	2	-	2	2	24+4-pin ATX	PAC-125G
SPXE-14S	14	-	1 (x16 connector)	-	12	-	-	24+4-pin ATX	RACK-305G, RACK-360G RACK-814G, RACK-3000G


SPE-4S

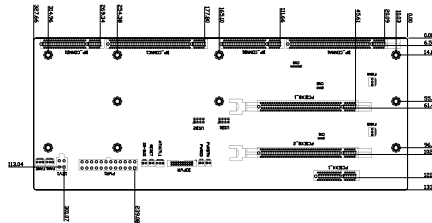

Ordering Information

SPE-4S-R10	4 Slot PICMG 1.3 Backplane with 2 PCIe x16 (x8 signal) and 1 PCIe x4 slots
PAC-106G-R20	6-slot full-size industrial chassis
PAC-107G-R20	6-slot full-size industrial chassis
PAC-1000G	6-slot full-size industrial chassis
PACO-506F	6-slot full-size industrial chassis



SPE-6S

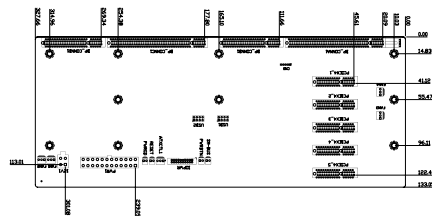

Ordering Information


SPE-6S-R10	6 Slot PICMG 1.3 Backplane with 5 PCIe x4 slots
PAC-106G-R20	6-slot full-size industrial chassis
PAC-107G-R20	6-slot full-size industrial chassis
PAC-1000G	6-slot full-size industrial chassis
PACO-506F	6-slot full-size industrial chassis

SPE-9S

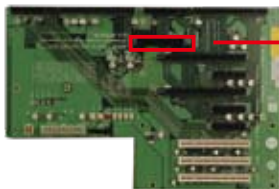

X8-PCIE-CB-R10
FFC(Flexible Flat Cable)



Earning extra PCIe x8 Bandwidth

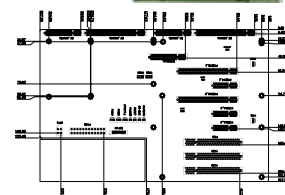

Ordering Information


SPE-9S-R10	9 Slot PICMG 1.3 Backplane with 2 PCIe x16 (x8 signal) 3 PCIe x4, and 3 PCI
PAC-125G-R20	10-slot full-size industrial chassis
X8-PCIE-CB-R10	PCIe x8 Connection Board for SPCIE-3600AM2

SPXE-9S

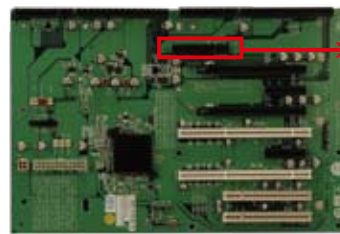

X8-PCIE-CB-R10
FFC(Flexible Flat Cable)


Earning extra PCIe x8 Bandwidth

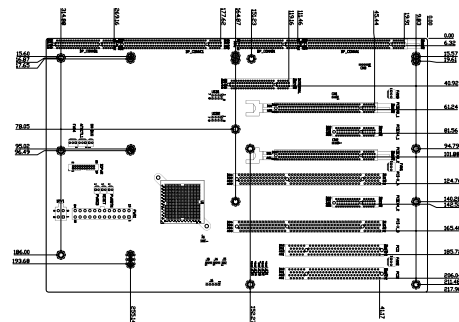

Ordering Information

SPXE-9S-R10	9 Slot PICMG 1.3 Backplane with 2 PCIe x16 (x8 signal) 2 PCIe x4, 2 PCI-X, and 2 PCI
PAC-125G-R20	10-slot full-size industrial chassis
X8-PCIE-CB-R10	PCIe x8 Connection Board for SPCIE-3600AM2

SPXE-14S

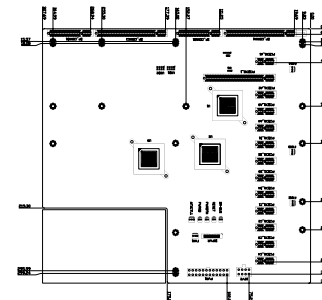

Ordering Information

SPXE-14S-R10	14-Slot PICMG 1.3 Backplane with 1 PCIe x16 (x8 signal) and 12 PCIe x1
RACK-305G-R20	4U rack-mount industrial chassis
RACK-360G-R20	4U rack-mount industrial chassis
RACK-814G-R20	4U rack-mount industrial chassis
RACK-3000G-R20	4U rack-mount industrial chassis